

SHURE®

LEGENDARY
PERFORMANCE™

DIS Digital Conference Systems
CS 6340 F Channel Selector

CS 6340 F Channel Selector

- 32 channels
- Horizontal and vertical versions
- 3-character OLED display
- Built-in auto-termination
- Firmware upgradeable
- Compact design



CS 6340 General Description

The CS 6340 F is a compact, fully digital channel selector unit in the DIS DCS 6000 Digital Conference System. The unit provides digital audio distribution of up to 32 language channels, including the floor channel.

The CS 6340 F enables a user to listen to up to 32 different channels by inserting headphones in the headphone jack and adjusting the volume and channel settings, using the control buttons.

The 3-character OLED display shows the volume and channel settings when the respective control buttons are being activated. Local flash memory in the unit can be programmed to store local parameters, such as start-up volume level and start-up channel number, overriding the global system settings.

The unit is available for flush mounted table installation in horizontal and vertical versions with an aluminum front plate.

Features

- Fully digital audio transmission
- DCS-LAN connection uses shielded Cat5e F/UTP or U/FTP cabling
- Audio distribution of up to 32 language channels, including the floor channel
- Front plate headphone connector
- Headphone connector at the back for remote connection
- Built-in DSP
- Volume and channel control buttons
- Local storing of volume and channel settings
- LCD display of channel numbers or language abbreviations
- Built-in auto-termination
- Vertical, horizontal, or customised mounting options
- Many features can be set by system commands
- Upgradeable firmware

Specifications

Electrical

Frequency response	65 Hz to 16 kHz
Power consumption	775 mW
Headphone connection	3.5 mm jack, female stereo socket
Display	3-character OLED

Interconnections

DCS-LAN	Two RJ45 female sockets with auto-termination
----------------	---

Mechanical

Mounting	Fixed
Dimensions (H x W x D)	95 x 45 x 50 mm
Weight	100 g
Color	Black
Temperature range	5° to 40° C


Certifications

The DCS 6000 system conforms to IEC 60914 standard.

How To Order

Horizontal flushmount channel selector for 32 channels.	CS 6340 FH
Vertical flushmount channel selector for 32 channels.	CS 6340 FV

Drawing

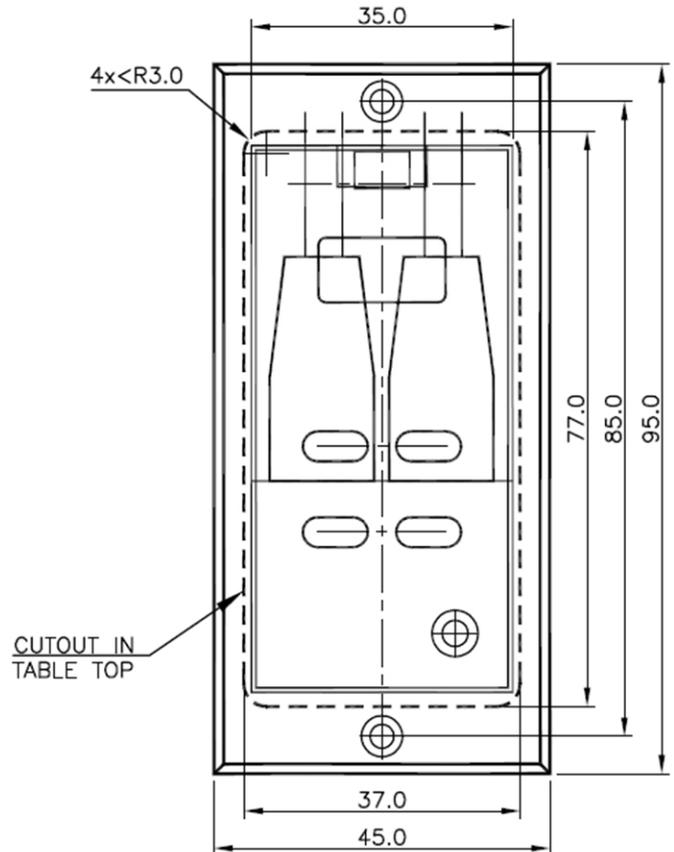

SHURE[®]
LEGENDARY
PERFORMANCE™

United States, Canada,
Latin America, Caribbean:
Shure Incorporated
5800 West Touhy Avenue
Niles, IL 60714-4608 USA

Phone: +1 847-600-2000
Fax: +1 847-600-1212 (USA)
Fax: +1 847-600-6446
Email: info@shure.com
www.shure.com

Europe, Middle East, Africa:
Shure Europe GmbH
Jakob-Dieffenbacher-Str. 12,
75031 Eppingen, Germany

Phone: +49-7262-92490
Fax: +49-7262-9249114
Email: info@shure.de
www.shure.eu

Asia, Pacific:
Shure Asia Limited
22/F, 625 King's Road
North Point, Island East
Hong Kong

Phone: +852-2893-4290
Fax: +852-2893-4055
Email: info@shure.com.hk
www.shureasia.com